


## COMPACT 200/400/800

HYDRAULIC UNDER-GROUND OPERATOR  
AND SEPARATE GATE SUPPORT BOX

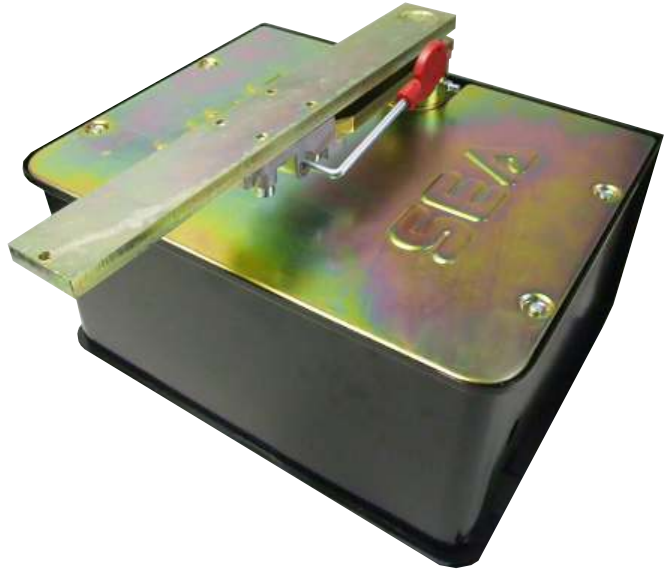

### The strength and reliability of a hydraulic system!

- Hydraulic underground operator for residential and commercial use.  
Compact 200 - max leaf width 2.0 m. weight 200 Kg. rotation 100°  
Compact 400 - max leaf width 4.0 m. weight 400 Kg. rotation 140°  
Compact 800 - max leaf width 4.0 m. weight 800 Kg. rotation 180°
- SEA TOTAL QUALITY: All main components are manufactured and tested in-house, ensuring the highest engineering standards.
- The electric motor and all operational components sit in an oil filled bath providing continuous lubrication and rapid cooling of all moving parts.
- Robust internal physical stops available, replacing the need for ground stops.
- Adjustable electronic slow down at end of travel for a smooth and quiet system of automation.
- Stainless steel gate support box available.



Key release optional



In built physical stops



Pressure adjustment valves

### Fast, reliable, safe, silent and secure!

- Locking version available for gate leaf widths up to 2.0 m and non locking version for gate leaf widths up to 4.0 m.
- Opening times for 90 degrees of 12 -14 seconds.
- Adjustable safety valves in both directions of travel to protect pedestrians, vehicles and even the automation equipment from excessive forces.
- Internal non return valves provide security against unauthorised access, with high security electromechanical and electro-magnetic locking systems available to suit any additional security requirements.
- Duty cycles of 45 operations per hour can cope with the busiest of commercial sites.
- Brass, aluminium and stainless steel parts for added durability, with thermal overload built into the motor windings for the highest protection levels.
- Manual release system with customised key ensures reliable operation even in the most demanding of locations.

When quality matters make sure it's SEA  
the engineers' choice!

SEA (UK) Limited.  
Unit 6A Olton Wharf, Solihull,  
West Midlands, B92 7RN  
Birmingham Tel: 0121 706 9629  
Birmingham Fax: 0121 764 5603  
London Tel: 020 8360 8022  
London Fax: 020 8364 2516  
sales@seaukld.co.uk  
www.seaukld.co.uk

# COMPACT

## Specifications

## COMPACT 200/ 400 / 800

Supply Voltage	230Vac+5% 50/60Hz
Motor Power	180 W / 220 W / 220W
Shaft Stroke	-
Cycles Hour	45
Operating temperature	-20°C + 55°C
Operator Weight	11.6 / 11.6 / 13.8 Kg
Max leaf length	2.0 mtr. locking 4.0 mtr. non locking
Opening Degrees	100° - 140° - 180°
Angular Speed	7° rotation per second
Protection class	Ip67
Starting Capacitor	8uF / 12.5 uF / 12.5uF
Max Rotational Torque	56 daN

## CONTROL BOARDS Technical Specifications


## Foundation Box Dimensions in (mm) COMPACT 200 /400 and 800

### Gate 1 (for 1 leaf)

- Management of a 230 Vac motor with or without limit switch.
- Automatic logic (4 modes), semiautomatic and step by step.
- Electronic slow down in opening and closing.
- Motor run time and pause open time regulation
- Self-learning operating time.
- Self-test on photocells.
- Self-diagnostics system.
- Encoder speed management (Safety Gate for swing gates).
- Diagnostic Leds on all outputs/inputs.
- Extractable connectors for ease of wiring.
- Integrated 433 MHz receiver compatible with radio transmitters SMART, HEADROLL and HEAD ECOPY series (800 users).
- Fully compatible with all SEA accessories.
- Compatible with all manufacturers of audio and video intercom equipment.
- Digital code pads.
- Card reader systems, stand alone and computer linked.
- Time clocks and hold open switches.
- Induction loop free entry, free exit and safety.
- Photocell free entry, free exit and safety.
- Patented rubber mechanical safety edges.
- Vehicle recognition systems.
- Biometric identification systems.

### Gate 2 (for 2 leaves)

- Management of two 230 Vac motors with or without limit switch
- Four logic systems available semi-automatic, safety, step by step and standard automatic.
- Electronic slow down in opening and closing.
- Motor run time and pause open time regulation.
- Fully programmable leaf delay system in opening and closing.
- Self-test on photocells.
- Self-diagnostic system.
- Encoder speed management (Safety Gate for swing gates)
- Electric lock management.
- Diagnostic Leds on all outputs/inputs.
- Extractable connectors for ease of wiring.
- Integrated 433 MHz receiver compatible with radio transmitters SMART, HEAD ROLL and HEAD ECOPY series (800 users).
- Optional control devices as standard:
  - Three different safety inputs as standard
  - Pedestrian gate inputs
  - Diagnostic functions
  - End of travel limits and encoder movement sensing
  - Stop circuits and flashing light system
- Fully compatible with all SEA accessories.
- Compatible with most manufacturers of audio and video intercom equipment.
- Digital code pads.
- Card reader systems, stand alone and computer linked.
- Time clocks and hold open switches.
- Induction loop free entry, free exit and safety.
- Photocell free entry, free exit and safety.
- Patented rubber mechanical safety edges.
- Vehicle recognition systems.
- Biometric identification systems.
- Electronic current sensors for electromechanical operators.
- Compatible with most manufacturers of automation equipment both hydraulic and electro-mechanical.
- Optional display system.
  - Alphanumeric LCD display 2 lines of 16 letters
  - Modify all program times
  - 10 event safety system fault recording
  - Customisation of logic functions
  - Full diagnostic functions

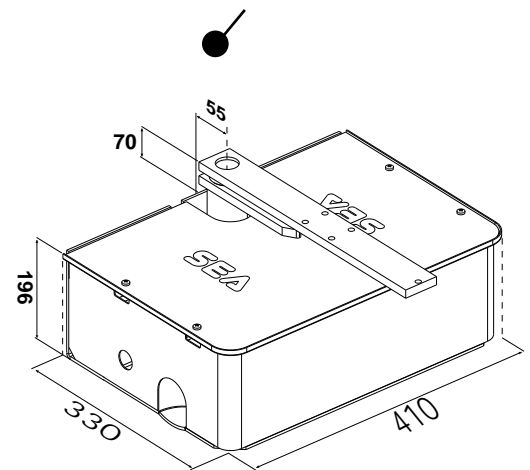


### Accessories.

Loop detectors / Photocells / Key pads / Card readers / Transmitters & receivers/ Telephone entry systems / Audio and video intercom systems wireless and cabled.  
Vehicle recognition systems / Biometric recognition systems / Patented rubber mechanical safety edge / Time clocks / Hold open switches.




### SAFETY GATE

SEA patented reversing system for swing gates. Self learning movement sensor for additional safety.



### Gate 2 Control Panel

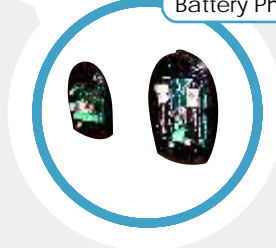

### Battery Photocells.

AC = Lock in opening and closing, SC= Lock only in closing, SA= Lock only in opening, SB= Without lock  
SB = Non locking for larger gate leaves and fall safe systems,

OPERATOR	AC	SB	SC	SA
COMPACT 200 / 400 / 800	•	•	-	-

• =Lock available      - = Lock not available