



GATE 2 DG CONTROL PANEL

Motor Supply **230VAC**

Accessories Supply **24VDC**

Lock Supply **12VAC**

The Gate 2 DG is SEA's main 230v control panel. Packed with useful features the Gate 2 can be continuously upgraded and customised when combined with the Jolly Programmer module. The feature list on this control unit is incredibly comprehensive, 230V current sensing, twin 8K2 safety inputs, encoder & limit switch support are just a handful of the tools available. It's easy to see why more and more installation companies are switching across to SEA just to use this panel.



Main Features

- 2 photocell contacts which can be set up independently with 7 logic settings for sliding gate or traffic barriers
- 2 safety edge contacts which can accept NC or 8k2 inputs; can be directional
- 6 separate logic settings
- 9 Auxiliary 24VDC output options allow maximum flexibility, perfect for any site
- Diagnostic dashes on screen for quick reference
- Diagnostic menu on Jolly programmer
- Limit switches supported
- 230V current sensing option
- Current sensing sensitivity, torque adjustment and tolerance at end of travel adjustment possible
- Firmware can be updated to keep panel at the forefront of Gate Industry technology

Compatible with any safety device on the market




Compatible with any 230V motor on the market



SEA
The Engineers'
Choice!


GATE 2 DG WIRING SCHEMATIC

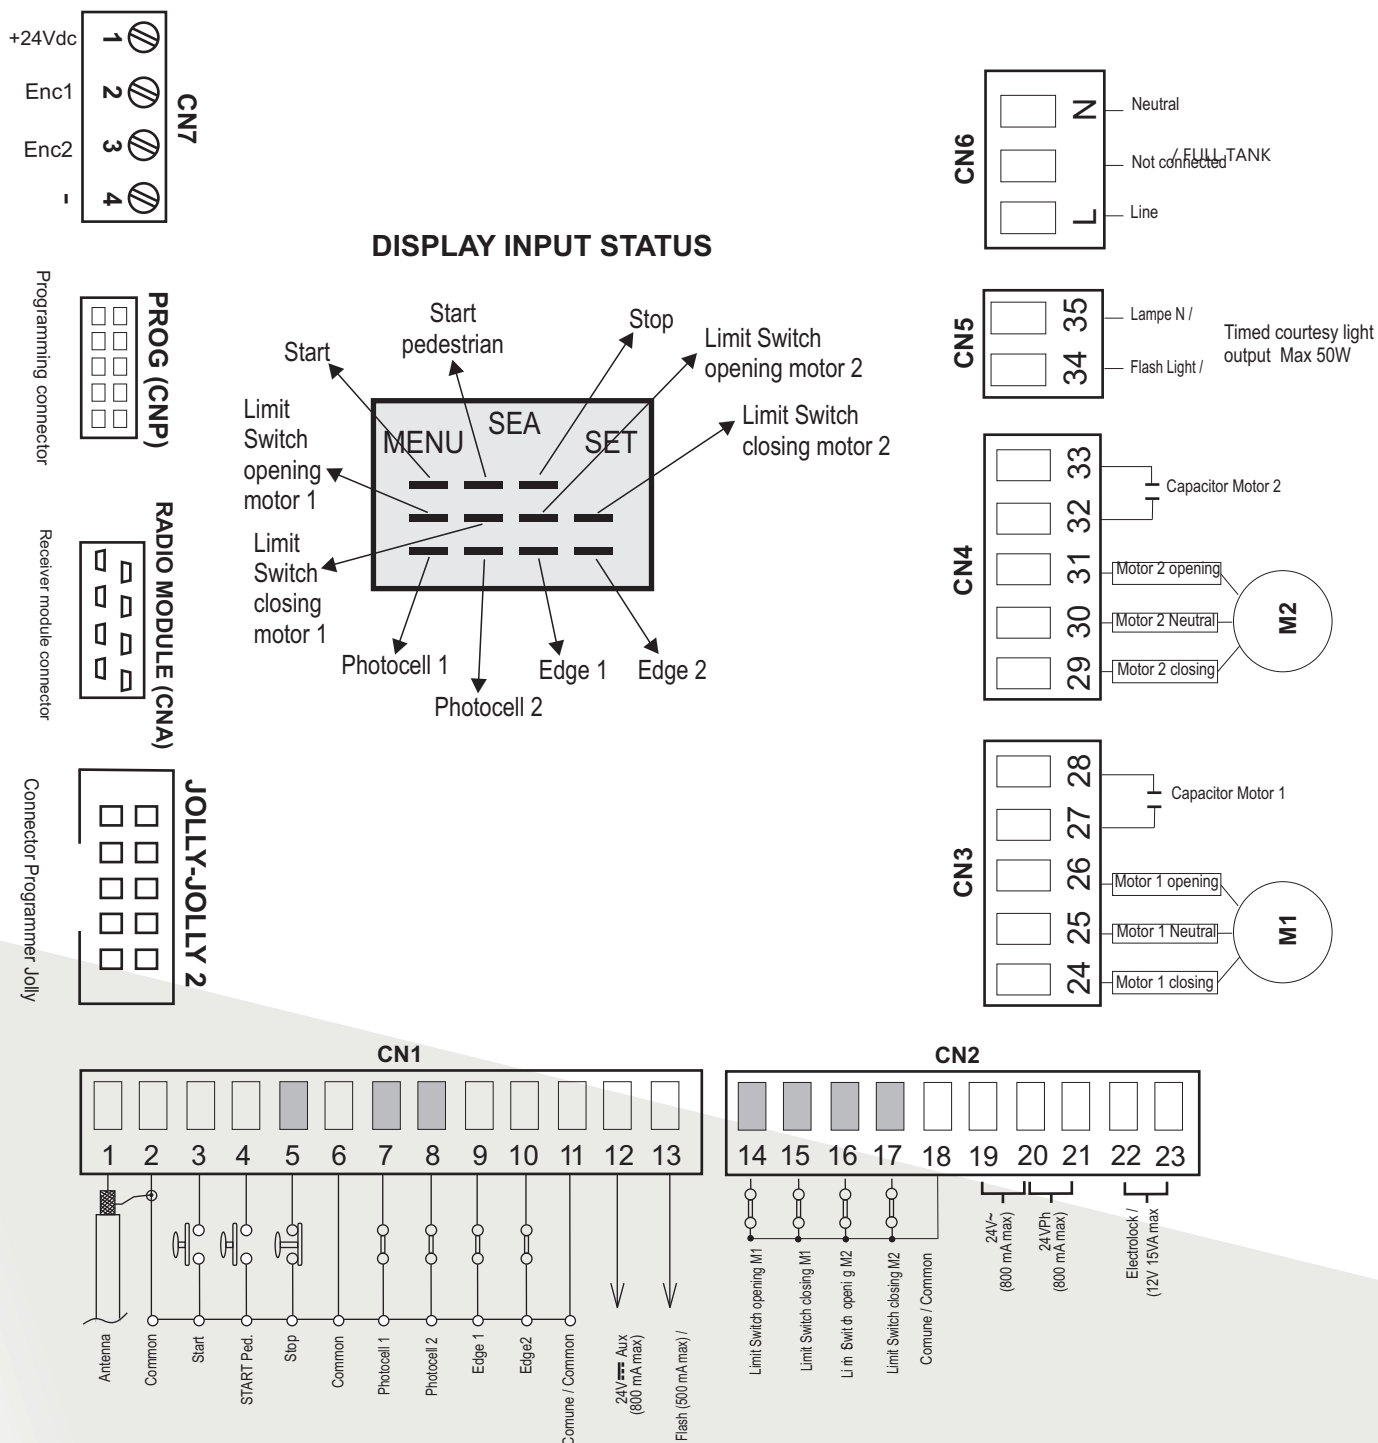

Add a universal receiver for use with any SEA key fob



Compatible with any intercom system



To get the most out of your Gate 2 DG we recommend using the Jolly Programmer unit