




SWING 2 DG CONTROL PANEL

Motor Supply **230VAC**
Accessories Supply **24VDC**
Lock Supply **12VAC**

The Swing 2 DG is SEA's new 230v domestic control panel. Like the Gate 2, the Swing 2 can be continuously upgraded and customised when combined with the Jolly Programmer module. More than adequate for any domestic installation it includes a dedicated 8K2 safety input for safety edges, 2 photocell contacts and a sophisticated logic microchip gives many more advanced options.

Main Features

- 2 photocell contacts which can be set up independently with 7 logic settings for sliding gate or traffic barriers
- Dedicated safety edge contacts which can accept NC or 8k2 inputs
- 6 separate logic settings
- 9 Auxiliary 24VDC output options allow maximum flexibility, perfect for any site
- Diagnostic dashes on screen for quick reference
- Diagnostic menu on Jolly programmer
- Firmware can be updated to keep panel at the forefront of Gate Industry technology

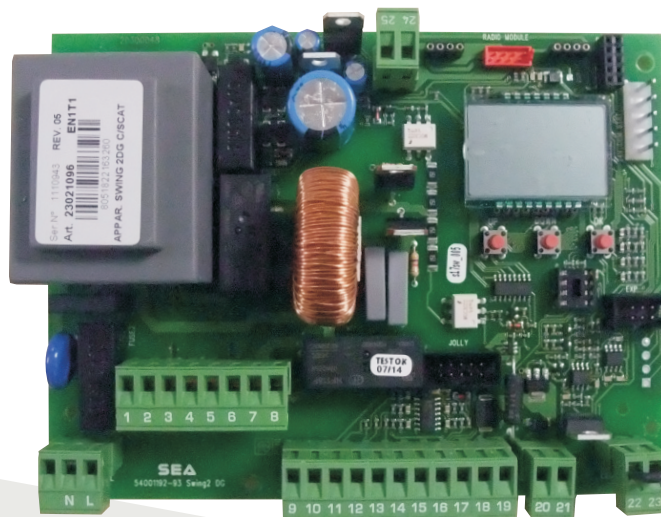

Compatible with any safety device on the market




Compatible with any 230V motor on the market



SEA
The Engineers'
Choice!

SWING 2 DG WIRING SCHEMATIC

Plug in receiver connection
for FAAC 455 panel

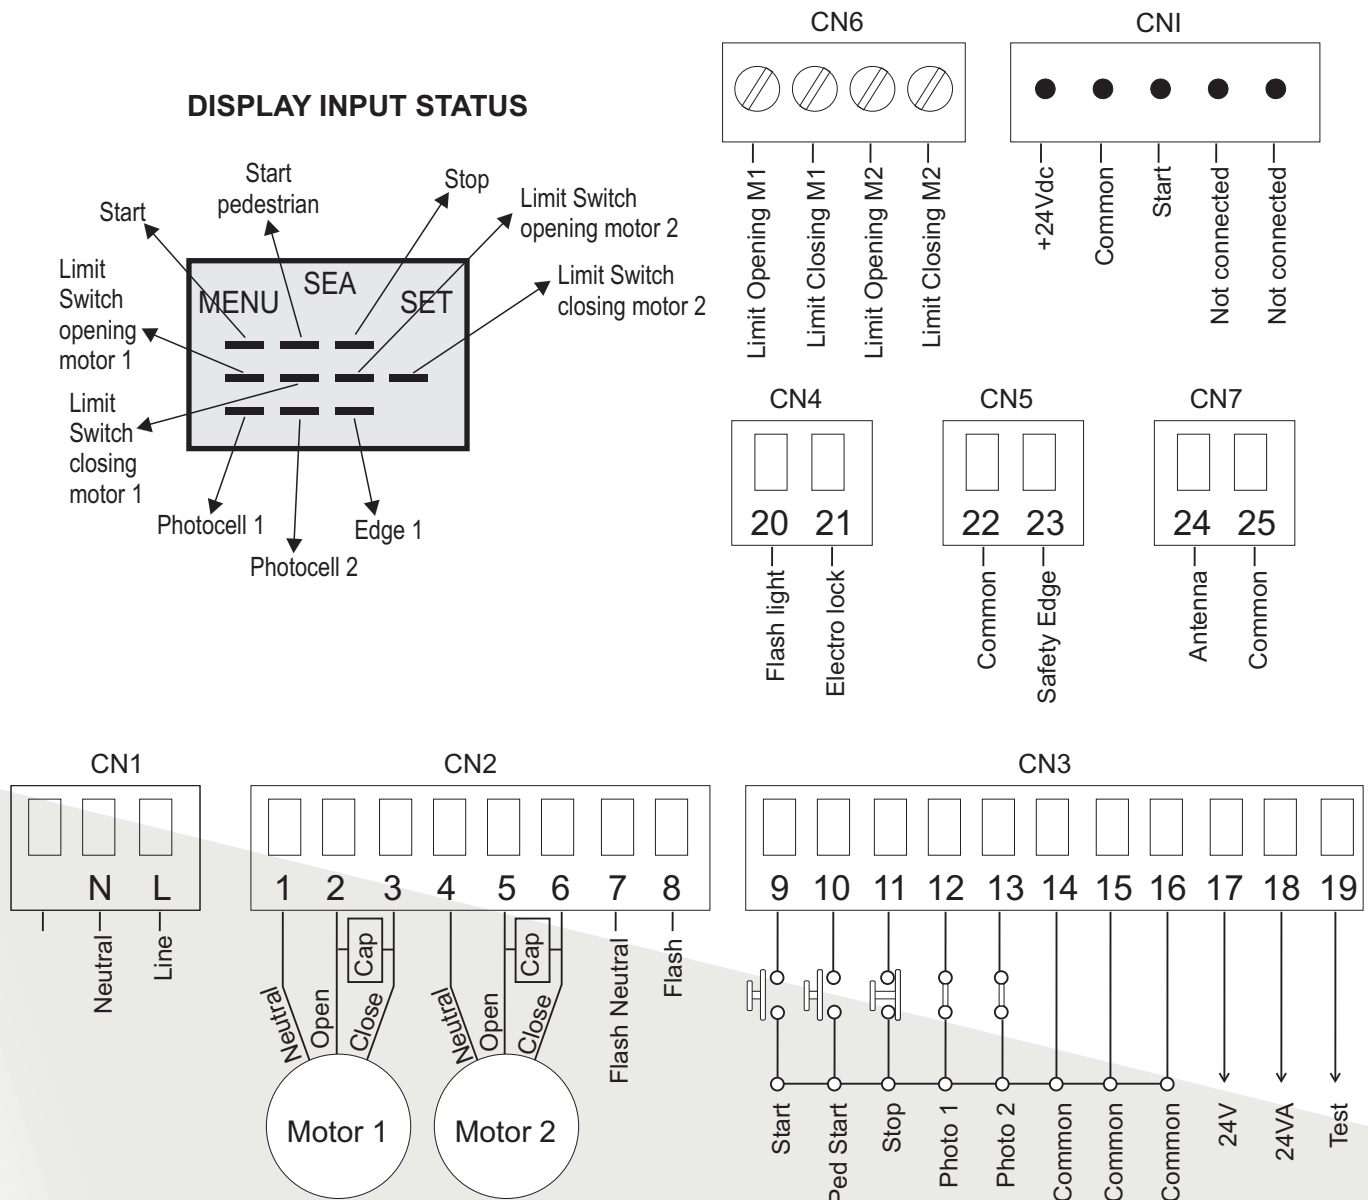

Add a universal
receiver for use with
any SEA key fob



Compatible with any
intercom system



To get the most out of
your Gate 2 DG we
recommend using the Jolly
Programmer unit