



# EVO WIRELESS SAFETY EDGE RECEIVER AND TRANSMITTERS

Power Supply **12/24VAC/DC & Battery**



Range **50M**

TX to RX Ratio **6 to 1**

The Radio EVO is the third generation of the wireless communication system with better performance and new features. The wireless receiver unit has two channel outputs and can have up to a maximum of 6 transmitter units programmed to the unit. The wireless transmitters are available in two versions. The first is a stand alone boxed transmitter that can be fixed to the gate. The second is an internal unit, this transmitter fits inside the edge so there are no external wires.

## Main Features

- Uses standard AA batteries for easy maintenance
- 2 Year battery life
- Up to 50M range
- Boxed version fits on wall and Edge version fits inside edge
- CAT 2 safety edges system
- 2 Channel receiver can accept 3 Transmitters each, allowing a maximum of 6 transmitters with each receiver.
- Self adjusting multichannel 868MHz

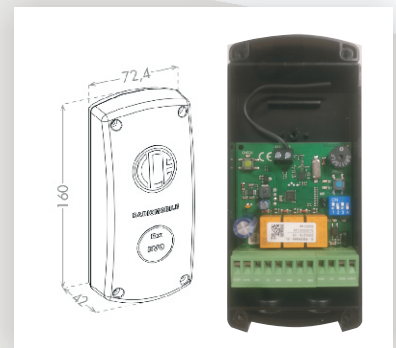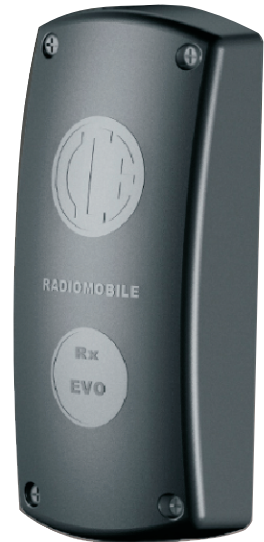

**SEA**  
**The Engineers'**  
**Choice!**